On the move in Approximately 20 minutes



Almost in Position



Inserting Connection Pins



Connecting Hoses





Securing Hoses

On the Move


OTHER PRODUCTS AND SERVICES

Australian Equipment Engineering also manufactures the SafeBoarder range of hydraulic access systems for mobile equipment. Along with a variety of ancillary products including axle stands, bucket stands, dump tray stands, tyre stands, jacking systems including belly guard jacks and platforms. These include bucket repair platforms as well as truck transmission and truck front service platforms.

Australian Equipment Engineering

Address: 11 Burns Road, Armadale, Western Australia 6112
Perth (WA) Head Office: +61 8 9399 8844, Rutherford (NSW) Office: +61 (0) 448 778 445
Global Sales: +61 (0) 427 778 401
Email: email@aeeng.com.au Website: www.safemover.com.au

SafeMover Retrieval Trailer

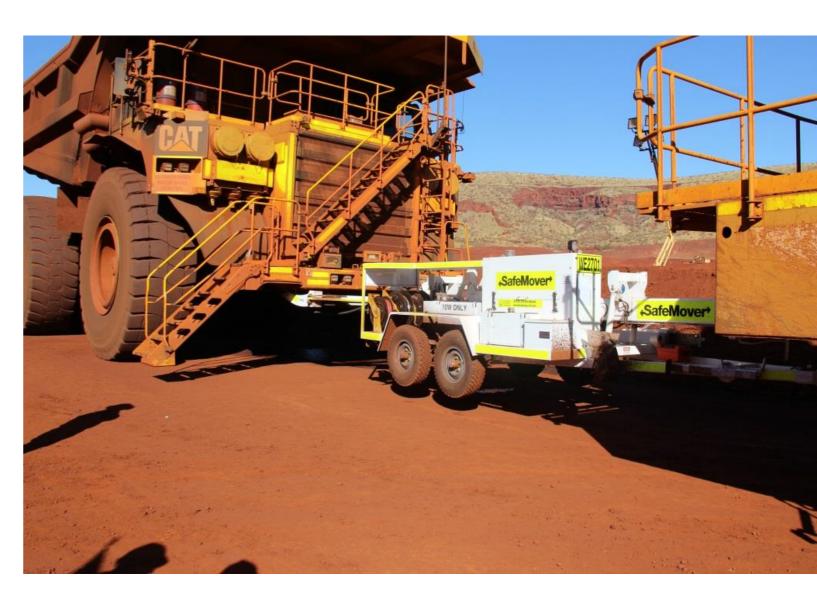

Confidence with Every Move







How much do you value your Personnel's safety?

- Eliminates repairing machines in the pit or on the haul road
- No risk of injury to Personnel from passing equipment
- Production loss minimised by a machine down in an operating area or on a haul road
- Takes approximately 20 minutes to connect and be on the move
- Equipment not in pieces in a dusty environment
- No need to build safety bunds around a machine to enable personnel to work on the disabled machine

Operational Features

- Designed to tow Dump trucks 90 ton and over; empty or loaded
- Capable of towing a fully loaded Ultra class truck up a 1 in 8 grade.
- Handle's the maximum drawbar pull of any rubber tired machine
- Can tow any other rubber tired machine with optional adaptors
- An Optional front 'A' frame that can be used for towing a disabled vehicle with a Dump truck that does not have a single tow point at the rear.
- Rear 'A' frame hydraulically swivels for easy attachment

- Boom Hydraulically raises and lowers for connection to tow and towed vehicles
- The SafeMover then retracts off the ground for towing
- The SafeMover Power pack supplies hydraulics for steering, brakes and hoist and air for machines with air operated brakes.
- 24 volt 25 amp power supply for the disabled vehicle
- Supplied with remote displays for the operators of both the towed and towing vehicle